



HR3 Reverse Osmosis Membrane Elements



HR3 Membrane Elements

Are manufactured using the industry's leading patented membrane film technology.

HR3 Membrane Elements offer reliability, high performance and deliver consistent results with high rejection, that equipment suppliers, distributors and dealers worldwide have come to rely on.

- High Rejection Rates
- Improved System Performance
- Superior Quality and Cost Savings
- Individually Tested and Sanitized
- Made in the U.S.A.



HR3 Membrane Elements



HR3 Membrane Elements are one of the industries most reliable and highest performing reverse osmosis elements. Advanced membrane technology and manufacturing processes ensure high quality and performance, allowing for improved system performance.

Operating Limits:

- Membrane Type: Thin Film Composite
- Maximum Operating Temperature: 110°F (43°C)
- Minimum Concentrate Flow Rate: 5:1
- pH Range, Continuous Operation: 3 - 11
- pH Range, Short Term Cleaning (30 Min.): 1 - 12
- Maximum Feed Water Turbidity: 1 NTU
- Maximum Feed Silt Density Index (SDI): 5 SDI
- Chlorine Tolerance: 0 PPM


Features:

- High Rejection (HR) Membrane Material
- Protective ABS Hard Shell
- Available “Wet” or “Dry”
- Private Labeling Available
- Made in the U.S.A.

Product Specifications:

Part Number	Description	Applied Pressure PSI (BAR)	Maximum Pressure PSI (BAR)	Permeate Flow Rate GPD	Nominal Salt Rejection (%)	Part Number	Description	Applied Pressure PSI (BAR)	Maximum Pressure PSI (BAR)	Permeate Flow Rate GPD	Nominal Salt Rejection (%)
1D2061	2514 TFC HR3	225 (15.51)	400 (27.58)	150	99	1D2064	4014 TFC HR3	225 (15.51)	400 (27.58)	400	99
1D2062	2521 TFC HR3	225 (15.51)	400 (27.58)	250	99	1D2065	4021 TFC HR3	225 (15.51)	400 (27.58)	900	99
1D2063	2540 TFC HR3	225 (15.51)	400 (27.58)	650	99	1D2066	4040 TFC HR3	225 (15.51)	400 (27.58)	2200	99

Permeate flow and salt rejection based on the following test conditions: 550 ppm Treated Tap Water, 77°F (25°C), 15% Permeate Recovery, 6.5 – 7.0 pH Range, and the specified applied pressure. Data taken after 30 minutes of operation. Maximum pressure drop for each element is 10 psi. Minimum salt rejection is 96%. Permeate flow for individual elements may vary +/- 20%.

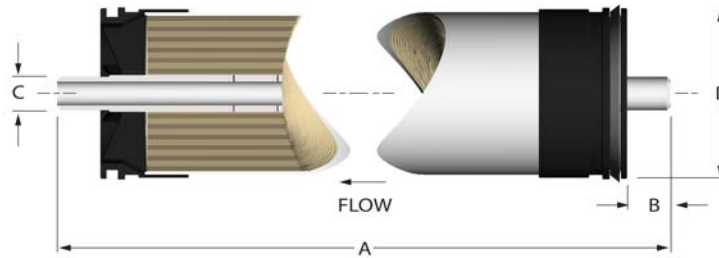

Dimensions (inches):

Description	A	B	C	D	Description	A	B	C	D
2514 TFC HR3	14	1.1	0.75	2.4	4014 TFC HR3	14	1.1	0.75	3.95
2521 TFC HR3	21	1.1	0.75	2.4	4021 TFC HR3	21	1.1	0.75	3.95
2540 TFC HR3	40	1.1	0.75	2.4	4040 TFC HR3	40	1.1	0.75	3.95

Under certain conditions, the presence of free chlorine and other oxidizing agents will cause premature membrane failure. Since oxidation damage is not covered under warranty, the manufacturer recommends removing residual free chlorine by pretreatment prior to membrane exposure. Wet tested membrane elements must be kept sealed and moist when in storage. Drying out may occur and damage the membrane permanently. Prevent elements from freezing or being exposed to direct sunlight. Wet tested elements are vacuum sealed in a polyethylene bag containing 1.0% sodium meta-bisulfite and then packaged in a cardboard box. Discard the permeate for the first two hours of operation. The permeate flow (product water flow) varies with feed water temperature. For membrane warranty information, please contact the manufacturer.

The manufacturer believes the information and data contained herein to be accurate and useful. The information and data are offered in good faith, but without guarantee, as conditions and methods of use of products are beyond the manufacturer's control. The manufacturer assumes no liability for results obtained or damages incurred through the application of the presented information and data. It is the user's responsibility to determine the appropriateness of these products for the user's specific end uses.

DISTRIBUTED BY:



541 Industrial Way, Suite 1, Fallbrook, CA 92028
T: (760) 723-5417
F: (760) 728-5062
E: sales@roultratec.com
W: www.roultratec.com