


RAH *Stainless steel filter net for HYDRA series filters*

RAH washable cartridges consist of a reinforced polypropylene frame (armouring) and AISI 316 stainless steel net, and are designed exclusively for HYDRA and HYDRA RAINMASTER series filters. The cartridges are manufactured without glue and sealants, nets are included while molding the structural frame. Thanks to the backwashing self-cleaning system of the filter, the filtering net is easy to wash, the materials are strong and durable developing high resistance to collapse.


MAX WORKING TEMPERATURE
45°C (113°F)
MIN WORKING TEMPERATURE
4°C (39,2°F)


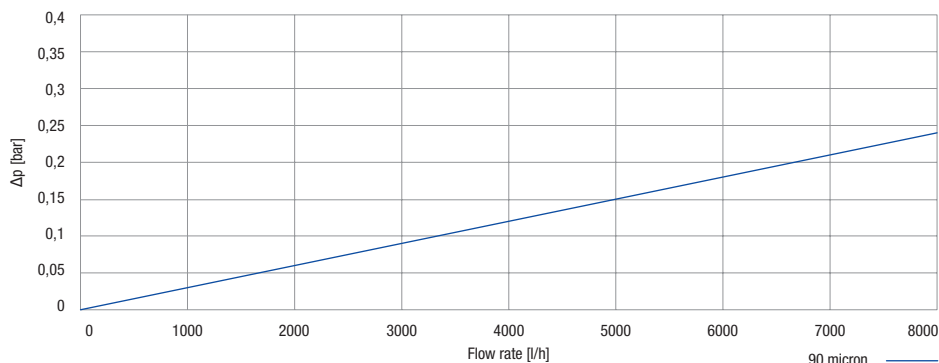

COLD WATER

Sediment filtration.
Average life-span: 24/36 months.
Maintenance: periodically perform a cartridge back wash in counter-current.

TECHNICAL SPECIFICATIONS

Selected raw materials, suitable for drinking water.
 Filter medium: stainless steel AISI 316.
 Armouring and end cap: reinforced polypropylene.
 Flat seals: SEBS with antimicrobial technology.

Tests carried on 7" elements type **RAH**. Testing mode: 20°C, 3 BAR



RAH

CODE NUMBER	MODEL	NOMINAL HEIGHT	MAX RECOMMENDED FLOW RATE l/h	DIMENSIONS mm		
				A	B	C
RA5000020	RAH - 90 mcr	7"	8000	162	80	29



RAH cartridges are tested and certified under the most stringent procedures worldwide, in compliance with DM 25 (Italy) and with the sanitary certification EAC/Ghostreghistrasia (Russia).

Specially designed for all HYDRA and HYDRA RAINMASTER self-cleaning filter series



-RAH-
single stage



-DUO RAH-
double stage



-TRIO RAH-
triple stage



-DS RAH-
with rotational
connection group



-K DP RAH-
with brass
head



-M RAH-
with 2 gauges



-K DP M RAH-
with brass head
and 2 gauges



-RAINMASTER DUO-
double stage RAH+CB EC



-RAINMASTER TRIO-
triple stage RAH+FA+CB EC



-RAINMASTER DUO-
double stage RAH+LA



-RAINMASTER TRIO-
triple stage RAH+FA+LA