


SANITARY - UP TO 400 LPM

Extending flow rate capability, the 5 round Sanitary housing is the first of the multi-round configurations to offer the benefit of future proofing application requirements. System capacity can be increased by 33%, without any pipework adjustments by simply exchanging a 30" body for the 40" version. The swing bolt closure mechanism assists cartridge change out even in these larger configurations.

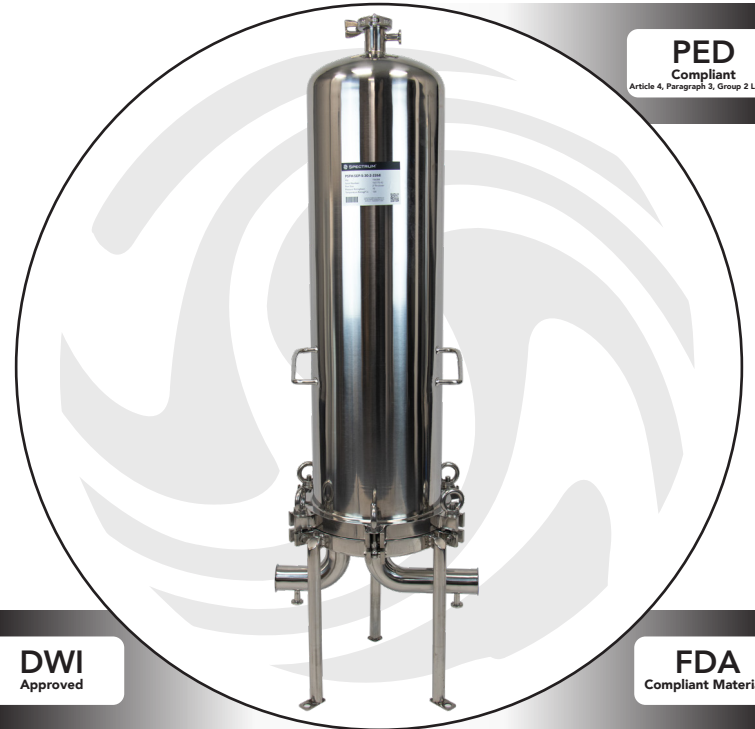

PED
Compliant
Article 4, Paragraph 3, Group 2 Liquids

DWI
Approved

FDA
Compliant Materials

FEATURES & BENEFITS



- 0.3µm Ra internal surface finish
- Tri-clamp ports for industry compatibility
- Diaphragmed pressure gauge included for filter monitoring
- Vent / test port for pressure release and integrity testing
- Accepts 226 end-cap for added security

TECHNICAL DATA



Port Sizes (")	2 Tri-Clamp
Cartridge Compatibility (")	30, 40
End-Cap Compatibility	226
Pressure Rating* (bar)	12.5
Temperature Rating (°C)	150


*Hydrostatic pressure rating.

MATERIALS OF CONSTRUCTION




- Body & Base: 316L Stainless Steel
- Internal Surface Finish: ≤0.3µm Ra
- External Surface Finish: ≤0.4µm Ra
- Housing Seal: EPDM
- Clamp & Legs: 304 Stainless Steel

DIMENSIONS

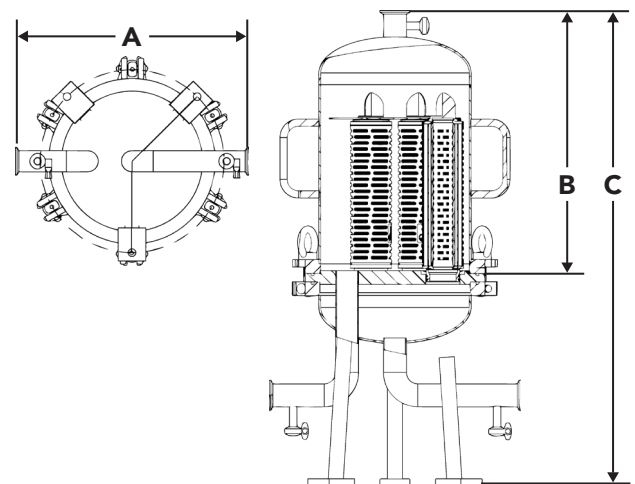

Dimensions (mm)			
Housing	A	B	C
PSFH-SEP-5-30	420	940	1280
PSFH-SEP-5-40	420	1190	1530

FLOW RATE 

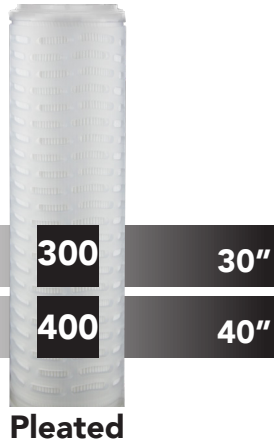

ORDERING GUIDE 

Code	Description
PSFH-SEP-5-30-2-226E	SPECTRUM Sanitary Filter Housing 5 X 30 226 End-Cap 2" Tri-Clamp EPDM Seal
PSFH-SEP-5-40-2-226E	SPECTRUM Sanitary Filter Housing 5 X 40 226 End-Cap 2" Tri-Clamp EPDM Seal

PRODUCT RANGE 

The below products have often been associated with this product.



1 Round

Flow up to 60 lpm



3 Round

Flow up to 180 lpm



5 Round

Flow up to 400 lpm



7 Round

Flow up to 560 lpm