

# AXEON

## Flow Meters


**AXEON Flow Meters** have an easy-to-read scale which has been silk-screened onto an acrylic body. These flow meters offer durability, accuracy and high quality. **AXEON Flow Meters** are offered in 1, 2, 5, 10, and 20 gallons per minute configurations.

### Features

- 1, 2, 5, 10 and 20 GPM Sizes Available
- Solid One Piece Injection Molded Acrylic Body
- Stainless Steel Float and Internals
- Models Available With 316 SS Integrated Needle Valve
- Permanent Screen Printed Scales
- Calibrations in GPM and LPM
- Individually Packaged
- 100% Tested for Accuracy

### Technical Specifications

- Body: Acrylic
- O-Rings: Silastic®
- Connections: Polypropylene
- Guide: 316 Stainless Steel
- Float: 316 Stainless Steel
- Maximum Pressure: 150 psi
- Temperature Rating: 120°F
- Accuracy: ±5% Accuracy

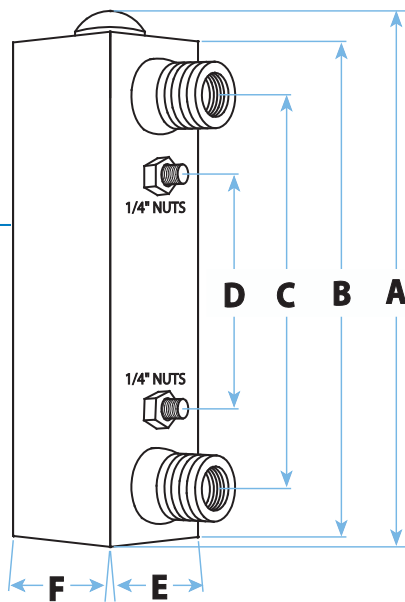

AXEON® Standard Flow Meters

Part Number	GPM Range	Integrated 316 SS Valve	Inner Connection	Outer Connection	A	B	C	D	E	F
203849	0.1-1 GPM	No	1/4" FNPT	1/2" MNPT	6.93"	6.62"	5.00"	3.00"	1.250"	1.375"
200897	0.2-2 GPM	No	1/4" FNPT	1/2" MNPT	6.93"	6.62"	5.00"	3.00"	1.250"	1.375"
205103	0.2-2 GPM	Yes	1/4" FNPT	1/2" MNPT	6.93"	6.62"	5.00"	3.00"	1.250"	1.375"
200898	1-5 GPM	No	1/4" FNPT	1/2" MNPT	6.93"	6.62"	5.00"	3.00"	1.250"	1.375"
205104	1-5 GPM	Yes	1/4" FNPT	1/2" MNPT	6.93"	6.62"	5.00"	3.00"	1.250"	1.375"
200899	1-10 GPM	No	1/2" FNPT	1" MNPT	9.30"	9.00"	6.50"	4.00"	1.760"	1.760"
205105	1-10 GPM	Yes	1/2" FNPT	1" MNPT	9.30"	9.00"	6.50"	4.00"	1.760"	1.760"
200900	2-20 GPM	No	1/2" FNPT	1" MNPT	9.30"	9.00"	6.50"	4.00"	1.760"	1.760"
205106	2-20 GPM	Yes	1/2" FNPT	1" MNPT	9.30"	9.00"	6.50"	4.00"	1.760"	1.760"

Engineered Membrane Solutions