# **ECONOMIC PLEAT - EYS**



#### **ROBUST AND REUSABLE**

The cylindrical design of the SPECTRUM EYS provides a simple sleeve of filter media which is protected and supported by a woven mesh and central core. The media, central core and endfitting are welded together to ensure cartridge integrity and to eliminate the risk of bypass. The cartridge is cleanable and reusable, which makes the lnox Economic ideal for applications where ongoing cost effectiveness is paramount.



#### **FEATURES & BENEFITS**



- 316L Stainless Steel cylindrical mesh allows for easy cleaning and re-use
- All- welded construction for strength and robustness

#### **TECHNICAL DATA**



Efficiency (%)	80	
Maximum Operating Pressure Differential (psi)	4.2	
Maximum Operating Temperature (°C)	260	
Surface Area (m²)	0.05 per 10"	

#### MATERIALS OF CONSTRUCTION




Media: 316L Stainless Steel
Support Media: 316L Stainless Steel
Core: 316L Stainless Steel
Cage (optional): 316L Stainless Steel


Seal: Buna / EPDM / Teflon® / Viton®

#### **DIMENSIONS**





Dimensions (mm)				
Length (")	Α	В	С	
93/4	27	248	64	
10	27	254	64	
20	27	508	64	
30	27	762	64	
40	27	1016	64	

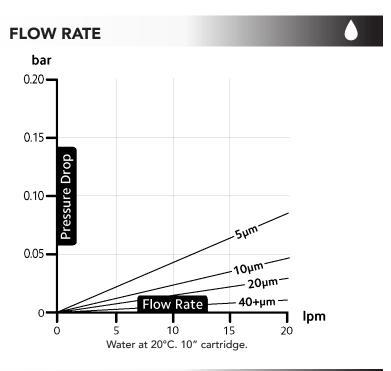

## **ORDERING GUIDE**



Code	Micron (µm)	Length (")	Seal
EYS	5, 10, 20, 40, 75, 100, 200, 250, 500, 850	9¾, 10, 20, 30, 40	B, E, T, V

e.g. EYS-5-20-B

### **PRODUCT RANGE**



The below products have often been associated with this product.

